

Lumos 300GT-MK

➤ KDC kf gs enqsgd eddkc % rst cm

- 400W Tungsten output
- Flicker Free
- Stable dimming (0%~100%)
- Standard DMX 512 / RDM
- 12~24V DC
- Supports Anton Bauer(Gold-mount) or V-mount Battery
- Adjustable color Temperature (3200~5600K / 2800~6500K)
- LED lifetime : 50,000 hours




➤ Ognsnl dsqdb hmndq `shmnne Kt I nr 2/ / FS, L J

CCT	LED option	4 ft	8 ft	12 ft	1m	2m	3m
3200K	Without lens (85°)	89 fc	22.2 fc	9.9 fc	1,340 lux	355 lux	158 lux
	With lens (55°)	133 fc	33.3 fc	14.8 fc	2,010 lux	533 lux	237 lux
	With lens (40°)	298 fc	74.5 fc	33.1 fc	4,500 lux	1,193 lux	530 lux
5600K	Without lens (85°)	102 fc	25.5 fc	11.3 fc	1,540 lux	408 lux	181 lux
	With lens (55°)	153 fc	38.3 fc	17.0 fc	2,310 lux	612 lux	272 lux
	With lens (40°)	338 fc	84.5 fc	37.5 fc	5,100 lux	1,352 lux	601 lux

➤ Kt I nr 2/ / FS, L J Rodbreb`shmr

Power Consumption	50W	
Size	W330 * H209 * L117 (mm) W13.00 * H8.22 * L4.57 (inch)	
Weight	4.5 kg / 10 lb	
Color Temperature	3200~5600K / 2800~6500K	
E Characteristics	AC 100~240V / 50~60Hz	
Input Voltage	12~24V DC (Free volt)	
Dimming	0~100%	
Control	Manual / DMX 512 / RDM	
Flicker	Flicker free	
Operating Temp.	0°C ~ 45°C	
Accessory	4-leaf barndoor Diffusing filter V-mount battery bracket Gold-mount battery bracket Honeycomb Grid	
Color temperature	3200K	5600K
CCT Tolerance	±150K	±150K
CRI	97 Ra	95 Ra

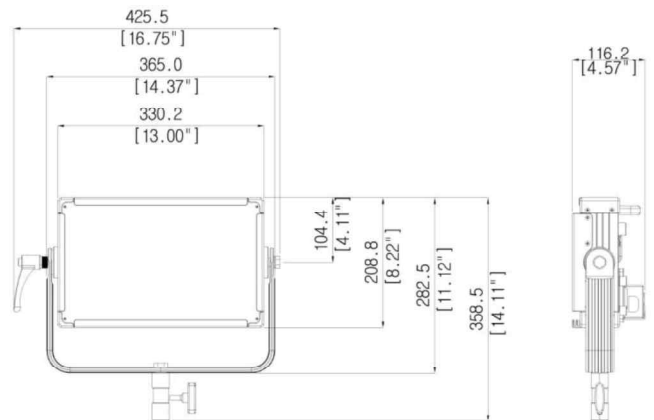

Lumos 300GT

➤ L ncd

Mode	Function																		
Dimming	<ul style="list-style-type: none"> Stable Dimming (0~100%) Enable to customize the dimming step as each 1% or 4~5% 																		
CCT (MK Type only)	<ul style="list-style-type: none"> 3200K~5600K or 2800~6500K (each 100K) <table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th colspan="3">CL WBBS Bnmsqku`lt d '17/ / } 54/ / J(</th> </tr> <tr> <th>CCT</th> <th>0~100%</th> <th>0~255</th> </tr> </thead> <tbody> <tr> <td>2800K</td> <td>0 %</td> <td>0</td> </tr> <tr> <td>3200K</td> <td>11~13 %</td> <td>28~34</td> </tr> <tr> <td>5600K</td> <td>77~79 %</td> <td>196~202</td> </tr> <tr> <td>6500K</td> <td>100 %</td> <td>255</td> </tr> </tbody> </table>	CL WBBS Bnmsqku`lt d '17/ / } 54/ / J(CCT	0~100%	0~255	2800K	0 %	0	3200K	11~13 %	28~34	5600K	77~79 %	196~202	6500K	100 %	255
CL WBBS Bnmsqku`lt d '17/ / } 54/ / J(
CCT	0~100%	0~255																	
2800K	0 %	0																	
3200K	11~13 %	28~34																	
5600K	77~79 %	196~202																	
6500K	100 %	255																	
DMX Address	<ul style="list-style-type: none"> Change DMX address (1~512) Standard DMX 512 F type DMX mode using 1 channel (Ch.1 – Dimming) MK type DMX mode using 2 Channel (Ch. 1 – Dimming / Ch.2 – CCT) Compatibility with various DMX Controllers Firmware available for most DMX Controllers 																		
LCD Back Light	<ul style="list-style-type: none"> On Off after 10 sec. 																		
RDM State	<ul style="list-style-type: none"> On Off 																		
Dimming curve	<ul style="list-style-type: none"> Customized dimming steps are available 3-way Dimming curve select to mode button ➤ Linear type : Normal increase of lighting intensity ➤ Cube type : Detailed control in Low dimming area (0~50%) ➤ Root type : Detailed control in high dimming area (50~100%) <p style="text-align: center;">Dimming Curve</p>																		
Dimming Speed	<ul style="list-style-type: none"> Very fast Fast Medium Slow 																		

Lumos 300GT

➤ Ognisni določb izmere K I nr 2 / FS

L ncdk	Ad I mf ld		0I	1I	2I	
Lumos 300GT 50W	No lens (85°)	Illumination	3200K	1,340 lux	355 lux	158 lux
			5600K	1,540 lux	408 lux	181 lux
		Beam diameter	Width	2.15 m	3.98 m	5.82 m
			Height	2.03 m	3.86 m	5.69 m
	Lens (55°)	Illumination	3200K	2,010 lux	533 lux	237 lux
			5600K	2,310 lux	612 lux	272 lux
		Beam diameter	Width	1.37 m	2.43 m	3.48 m
			Height	1.24 m	2.28 m	3.32 m
	Lens (40°)	Illumination	3200K	4,500 lux	1,193 lux	530 lux
			5600K	5,100 lux	1,352 lux	601 lux
		Beam diameter	Width	1.05 m	1.77 m	2.50 m
			Height	0.92 m	1.65 m	2.38 m