

Lumos 700GT-MK

➤ KDC Kf gs enq sgdl eddkc % rst cm

- 1.5KW Tungsten output
- Flicker Free
- Stable dimming (0%~100%)
- Standard DMX 512 / RDM
- 12~24V DC
- Adjustable color Temperature (3200~5600K / 2800~6500K)
- LED lifetime : 50,000 hours




➤ Ognsnl dsqtb hmndq `shmnne Kt I nr 6// FS, L J

| CCT | LED option | 4 ft | 8 ft | 12 ft | 16 ft | 20 ft | 1m | 2m | 3m | 4m | 5m |
|-------|--------------------|------------|----------|----------|---------|---------|------------|-----------|-----------|-----------|---------|
| 3200K | Without lens (85°) | 357.7 fc | 89.4 fc | 39.7 fc | 22.4 fc | 14.3 fc | 5,400 lux | 1,431 lux | 636 lux | 358 lux | 229 lux |
| | With lens (55°) | 576.4 fc | 144.1 fc | 64 fc | 36 fc | 23.1 fc | 8,700 lux | 2,306 lux | 1,025 lux | 576 lux | 369 lux |
| | With lens (40°) | 1,053.4 fc | 263.3 fc | 117 fc | 65.8 fc | 42.1 fc | 15,900 lux | 4,214 lux | 1,873 lux | 1,053 lux | 674 lux |
| 5600K | Without lens (85°) | 390.9 fc | 97.7 fc | 43.4 fc | 24.4 fc | 15.6 fc | 5,900 lux | 1,564 lux | 695 lux | 391 lux | 250 lux |
| | With lens (55°) | 629.4 fc | 157.3 fc | 69.9 fc | 39.3 fc | 25.2 fc | 9,500 lux | 2,518 lux | 1,119 lux | 629 lux | 403 lux |
| | With lens (40°) | 1,139.5 fc | 284.9 fc | 126.6 fc | 71.2 fc | 45.6 fc | 17,200 lux | 4,558 lux | 2,026 lux | 1,140 lux | 729 lux |

➤ Kt I nr 6// FS, L J Rodbreb`shmr

| | | |
|-------------------|---|-------|
| Power Consumption | 200W | |
| Size | W493 * H353 * L136 (mm) W19.41 * H13.91 * L5.33 (inch) | |
| Weight | 8.8 kg / 19.4 lb | |
| Color Temperature | 3200~5600K / 2800~6500K | |
| E Characteristics | AC 100~240V / 50~60Hz | |
| Input Voltage | 12~24V DC (Free volt) | |
| Dimming | 0~100% | |
| Control | Manual / DMX 512 / RDM | |
| Flicker | Flicker free | |
| Operating Temp. | 0°C ~ 45°C | |
| Accessory | 4-leaf barndoor Diffusing filter Honeycomb Grid Pole operated yoke | |
| Color temperature | 3200K | 5600K |
| CCT Tolerance | ±150K | ±150K |
| CRI | 97 Ra | 95 Ra |

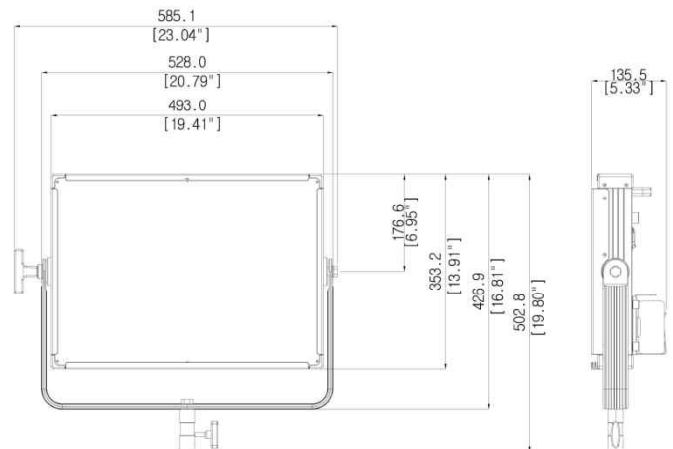

Lumos 700GT

➤ L ncd

| Mode | Function | | | | | | | | | | | | | | | | | | |
|---|--|---|--|--|-----|--------|-------|-------|-----|---|-------|---------|-------|-------|---------|---------|-------|-------|-----|
| Dimming | <ul style="list-style-type: none"> Stable Dimming (0~100%) Enable to customize the dimming step as each 1% or 4~5% | | | | | | | | | | | | | | | | | | |
| CCT (MK Type only) | <ul style="list-style-type: none"> 3200K~5600K or 2800~6500K (each 100K) <table border="1"> <thead> <tr> <th colspan="3">CL WBBS Bnmsqku` It d '17/ / } 54/ / J(</th> </tr> <tr> <th>CCT</th> <th>0~100%</th> <th>0~255</th> </tr> </thead> <tbody> <tr> <td>2800K</td> <td>0 %</td> <td>0</td> </tr> <tr> <td>3200K</td> <td>11~13 %</td> <td>28~34</td> </tr> <tr> <td>5600K</td> <td>77~79 %</td> <td>196~202</td> </tr> <tr> <td>6500K</td> <td>100 %</td> <td>255</td> </tr> </tbody> </table> | CL WBBS Bnmsqku` It d '17/ / } 54/ / J(| | | CCT | 0~100% | 0~255 | 2800K | 0 % | 0 | 3200K | 11~13 % | 28~34 | 5600K | 77~79 % | 196~202 | 6500K | 100 % | 255 |
| CL WBBS Bnmsqku` It d '17/ / } 54/ / J(| | | | | | | | | | | | | | | | | | | |
| CCT | 0~100% | 0~255 | | | | | | | | | | | | | | | | | |
| 2800K | 0 % | 0 | | | | | | | | | | | | | | | | | |
| 3200K | 11~13 % | 28~34 | | | | | | | | | | | | | | | | | |
| 5600K | 77~79 % | 196~202 | | | | | | | | | | | | | | | | | |
| 6500K | 100 % | 255 | | | | | | | | | | | | | | | | | |
| DMX Address | <ul style="list-style-type: none"> Change DMX address (1~512) Standard DMX 512 F type DMX mode using 1 channel (Ch.1 – Dimming) MK type DMX mode using 2 Channel (Ch. 1 – Dimming / Ch.2 – CCT) Compatibility with various DMX Controllers Firmware available for most DMX Controllers | | | | | | | | | | | | | | | | | | |
| LCD Back Light | <ul style="list-style-type: none"> On Off after 10 sec. | | | | | | | | | | | | | | | | | | |
| RDM State | <ul style="list-style-type: none"> On Off | | | | | | | | | | | | | | | | | | |
| Dimming curve | <ul style="list-style-type: none"> Customized dimming steps are available 3-way Dimming curve select to mode button ➤ Linear type : Normal increase of lighting intensity ➤ Cube type : Detailed control in Low dimming area (0~50%) ➤ Root type : Detailed control in high dimming area (50~100%) <p style="text-align: center;">Dimming Curve</p> | | | | | | | | | | | | | | | | | | |
| Dimming Speed | <ul style="list-style-type: none"> Very fast Fast Medium Slow | | | | | | | | | | | | | | | | | | |
| 12~24V Free volt | <ul style="list-style-type: none"> Compatible with wide range of batteries. V-mount battery or Gold-mount battery | | | | | | | | | | | | | | | | | | |

Lumos 700GT

➤ Ognisni določb izmere Kt I nr 6 // FS

| L ncdk | | Ad l mf ld | | 0l | 1l | 2l | 3l | 4l |
|---------------------|------------------|---------------|--------|------------|-----------|-----------|-----------|---------|
| Lumos 700GT 200W | No lens (85°) | Illumination | 3200K | 5,400 lux | 1,431 lux | 636 lux | 358 lux | 229 lux |
| | | | 5600K | 5,900 lux | 1,564 lux | 695 lux | 391 lux | 250 lux |
| | | Beam diameter | Width | 2.32 m | 4.15 m | 5.98 m | 7.81 m | 9.65 m |
| | | | Height | 2.18 m | 4.01 m | 5.84 m | 7.67 m | 9.51 m |
| | Lens (55°) | Illumination | 3200K | 8,700 lux | 2,306 lux | 1,025 lux | 576 lux | 369 lux |
| | | | 5600K | 9,500 lux | 2,518 lux | 1,119 lux | 629 lux | 403 lux |
| | | Beam diameter | Width | 1.52 m | 2.57 m | 3.61 m | 4.65 m | 5.69 m |
| | | | Height | 1.39 m | 2.42 m | 3.47 m | 4.51 m | 5.51 m |
| | Lens (40°) | Illumination | 3200K | 15,900 lux | 4,214 lux | 1,873 lux | 1,053 lux | 674 lux |
| | | | 5600K | 17,200 lux | 4,558 lux | 2,026 lux | 1,140 lux | 729 lux |
| | | Beam diameter | Width | 1.21 m | 1.94 m | 2.67 m | 3.40 m | 4.12 m |
| | | | Height | 1.07 m | 1.80 m | 2.53 m | 3.26 m | 3.98 m |

Lumos 700GT

➤ Kt I nr 6 / FS v lsg Onld nodq sdc xnj d

| | |
|------|--|
| Size | W599.7 * H549.1 * L144.3 (mm) / W23.61 * H21.62 * L5.68 (inch) |
|------|--|

