

Lumos 500GT-F

➤ KDC Kf gs enq sgdl edlk % rst cm

- 1KW Tungsten output
- Flicker Free
- Stable dimming (0%~100%)
- Standard DMX 512 / RDM
- 12~24V DC
- Supports Anton Bauer(Gold-mount) or V-mount Battery
- LED lifetime : 50,000 hours




➤ Ognsl dsqtb lmrnd `shmnne Kt I nr 4/ / FS,E

CCT	LED option	4 ft	8 ft	12 ft	16 ft	20 ft	1m	2m	3m	4m	5m
3200K	Without lens (85°)	198.7 fc	49.7 fc	22.1 fc	12.4 fc	7.9 fc	3,000 lux	800 lux	350 lux	200 lux	130 lux
	With lens (55°)	327.9 fc	82 fc	36.4 fc	20.5 fc	13.1 fc	4,950 lux	1,310 lux	580 lux	330 lux	210 lux
	With lens (40°)	643.9 fc	161 fc	71.5 fc	40.2 fc	25.8 fc	9,720 lux	2,580 lux	1,140 lux	640 lux	410 lux
5600K	Without lens (85°)	215.3 fc	53.8 fc	23.9 fc	13.5 fc	8.6 fc	3,250 lux	860 lux	380 lux	220 lux	140 lux
	With lens (55°)	351.1 fc	87.8 fc	39 fc	21.9 fc	14 fc	5,300 lux	1,400 lux	620 lux	350 lux	330 lux
	With lens (40°)	697.6 fc	174.4 fc	77.5 fc	43.6 fc	27.9 fc	10,530 lux	2,790 lux	1,240 lux	700 lux	450 lux

➤ Kt I nr 4/ / FS,E Rodbrtb`shmr

Power Consumption	120W	
Size	W411 * H276 * L129 (mm) W16.19 * H10.88 * L5.08 (inch)	
Weight	6.0 kg / 13.2 lb	
Color Temperature	3200K or 5600K	
E Characteristics	AC 100~240V / 50~60Hz	
Input Voltage	12~24V DC (Free volt)	
Dimming	0~100%	
Control	Manual / DMX 512 / RDM	
Flicker	Flicker free	
Operating Temp.	0°C ~ 45°C	
Accessory	4-leaf barndoor Diffusing filter V-mount battery bracket Gold-mount battery bracket Honeycomb Grid Pole operated yoke	
Color temperature	3200K	5600K
CCT Tolerance	±150K	±150K
CRI	97 Ra	95 Ra

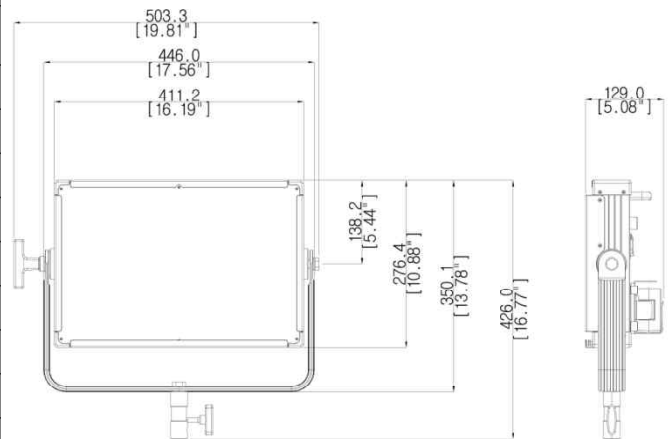

Lumos 500GT

➤ L ncd

Mode	Function																		
Dimming	<ul style="list-style-type: none"> Stable Dimming (0~100%) Enable to customize the dimming step as each 1% or 4~5% 																		
CCT (MK Type only)	<ul style="list-style-type: none"> 3200K~5600K or 2800~6500K (each 100K) <table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th colspan="3">CL WBBS Bnmsqku`lt d '17/ / } 54/ / J(</th> </tr> <tr> <th>CCT</th> <th>0~100%</th> <th>0~255</th> </tr> </thead> <tbody> <tr> <td>2800K</td> <td>0 %</td> <td>0</td> </tr> <tr> <td>3200K</td> <td>11~13 %</td> <td>28~34</td> </tr> <tr> <td>5600K</td> <td>77~79 %</td> <td>196~202</td> </tr> <tr> <td>6500K</td> <td>100 %</td> <td>255</td> </tr> </tbody> </table>	CL WBBS Bnmsqku`lt d '17/ / } 54/ / J(CCT	0~100%	0~255	2800K	0 %	0	3200K	11~13 %	28~34	5600K	77~79 %	196~202	6500K	100 %	255
CL WBBS Bnmsqku`lt d '17/ / } 54/ / J(
CCT	0~100%	0~255																	
2800K	0 %	0																	
3200K	11~13 %	28~34																	
5600K	77~79 %	196~202																	
6500K	100 %	255																	
DMX Address	<ul style="list-style-type: none"> Change DMX address (1~512) Standard DMX 512 F type DMX mode using 1 channel (Ch.1 – Dimming) MK type DMX mode using 2 Channel (Ch. 1 – Dimming / Ch.2 – CCT) Compatibility with various DMX Controllers Firmware available for most DMX Controllers 																		
LCD Back Light	<ul style="list-style-type: none"> On Off after 10 sec. 																		
RDM State	<ul style="list-style-type: none"> On Off 																		
Dimming curve	<ul style="list-style-type: none"> Customized dimming steps are available 3-way Dimming curve select to mode button ➤ Linear type : Normal increase of lighting intensity ➤ Cube type : Detailed control in Low dimming area (0~50%) ➤ Root type : Detailed control in high dimming area (50~100%) <p style="text-align: center;">Dimming Curve</p>																		
Dimming Speed	<ul style="list-style-type: none"> Very fast Fast Medium Slow 																		

Lumos 500GT

➤ Ognisni dscj b hrend ` s h m n e K t l nr 4 / / FS

L ncdk	Ad l ` mf ld		0l	1l	2l	3l	4l	
Lumos 500GT 120W	No lens (85°)	Illumination	3200K	3,000 lux	800 lux	350 lux	200 lux	130 lux
			5600K	3,250 lux	860 lux	380 lux	220 lux	140 lux
		Beam diameter	Width	2.23 m	4.06 m	5.90 m	7.73 m	9.56 m
			Height	2.10 m	3.93 m	5.76 m	7.59 m	9.43 m
	Lens (55°)	Illumination	3200K	4,950 lux	1,310 lux	580 lux	330 lux	210 lux
			5600K	5,300 lux	1,400 lux	620 lux	350 lux	330 lux
		Beam diameter	Width	1.44 m	2.48 m	3.48 m	4.52 m	5.60 m
			Height	1.30 m	2.35 m	3.39 m	4.43 m	5.47 m
	Lens (40°)	Illumination	3200K	9,720 lux	2,580 lux	1,140 lux	640 lux	410 lux
			5600K	10,530 lux	2,790 lux	1,240 lux	700 lux	450 lux
		Beam diameter	Width	1.13 m	1.85 m	2.58 m	3.31 m	4.04 m
			Height	0.99 m	1.72 m	2.45 m	3.18 m	3.90 m

Lumos 500GT

➤ **Kl I nr 4 / FS v log Onkd nodq sdc xnj d**

Size	W517.9 * H472.3 * L137.8 (mm) / W20.39 * H18.59 * L5.42 (inch)
------	----------------------------------------------------------------

