

Lumos 700GT-F

➤ KDC Kf gs enq sgdl eddkc % rst cm

- 1.5KW Tungsten output
- Flicker Free
- Stable dimming (0%~100%)
- Standard DMX 512
- 12~24V DC
- LED lifetime : 50,000 hours




➤ Ognsl dsqtb lmrnd `shmnne Kt I nr 6/ / FS, E

CCT	LED option	4 ft	8 ft	12 ft	16 ft	20 ft	1m	2m	3m	4m	5m
3200K	Without lens (85°)	357.7 fc	89.4 fc	39.7 fc	22.4 fc	14.3 fc	5,400 lux	1,431 lux	636 lux	358 lux	229 lux
	With lens (55°)	576.4 fc	144.1 fc	64 fc	36 fc	23.1 fc	8,700 lux	2,306 lux	1,025 lux	576 lux	369 lux
	With lens (40°)	1,053.4 fc	263.3 fc	117 fc	65.8 fc	42.1 fc	15,900 lux	4,214 lux	1,873 lux	1,053 lux	674 lux
5600K	Without lens (85°)	390.9 fc	97.7 fc	43.4 fc	24.4 fc	15.6 fc	5,900 lux	1,564 lux	695 lux	391 lux	250 lux
	With lens (55°)	629.4 fc	157.3 fc	69.9 fc	39.3 fc	25.2 fc	9,500 lux	2,518 lux	1,119 lux	629 lux	403 lux
	With lens (40°)	1,139.5 fc	284.9 fc	126.6 fc	71.2 fc	45.6 fc	17,200 lux	4,558 lux	2,026 lux	1,140 lux	729 lux

➤ Kt I nr 6/ / FS, E Rodbletb`shmr

Power Consumption	200W	
Size	W493 * H353 * L136 (mm) W19.41 * H13.91 * L5.33 (inch)	
Weight	8.8 kg / 19.4 lb	
Color Temperature	3200K or 5600K	
E Characteristics	AC 100~240V / 50~60Hz	
Input Voltage	12~24V DC (Free volt)	
Dimming	0~100%	
Control	Manual / DMX 512 / RDM	
Flicker	Flicker free	
Operating Temp.	0°C ~ 45°C	
Accessory	4-leaf barndoor Diffusing filter Honeycomb Grid Pole operated yoke	
Color temperature	3200K	5600K
CCT Tolerance	±150K	±150K
CRI	97 Ra	95 Ra

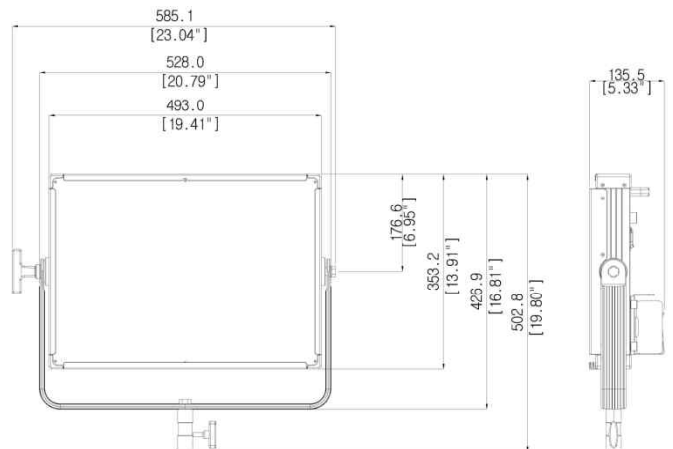

Lumos 700GT

➤ L ncd

Mode	Function																		
Dimming	<ul style="list-style-type: none"> Stable Dimming (0~100%) Enable to customize the dimming step as each 1% or 4~5% 																		
CCT (MK Type only)	<ul style="list-style-type: none"> 3200K~5600K or 2800~6500K (each 100K) <table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th colspan="3">CL WBBS Bnmsqku` It d '17/ / } 54/ / J(</th> </tr> <tr> <th>CCT</th> <th>0~100%</th> <th>0~255</th> </tr> </thead> <tbody> <tr> <td>2800K</td> <td>0 %</td> <td>0</td> </tr> <tr> <td>3200K</td> <td>11~13 %</td> <td>28~34</td> </tr> <tr> <td>5600K</td> <td>77~79 %</td> <td>196~202</td> </tr> <tr> <td>6500K</td> <td>100 %</td> <td>255</td> </tr> </tbody> </table>	CL WBBS Bnmsqku` It d '17/ / } 54/ / J(CCT	0~100%	0~255	2800K	0 %	0	3200K	11~13 %	28~34	5600K	77~79 %	196~202	6500K	100 %	255
CL WBBS Bnmsqku` It d '17/ / } 54/ / J(
CCT	0~100%	0~255																	
2800K	0 %	0																	
3200K	11~13 %	28~34																	
5600K	77~79 %	196~202																	
6500K	100 %	255																	
DMX Address	<ul style="list-style-type: none"> Change DMX address (1~512) Standard DMX 512 F type DMX mode using 1 channel (Ch.1 – Dimming) MK type DMX mode using 2 Channel (Ch. 1 – Dimming / Ch.2 – CCT) Compatibility with various DMX Controllers Firmware available for most DMX Controllers 																		
LCD Back Light	<ul style="list-style-type: none"> On Off after 10 sec. 																		
RDM State	<ul style="list-style-type: none"> On Off 																		
Dimming curve	<ul style="list-style-type: none"> Customized dimming steps are available 3-way Dimming curve select to mode button ➤ Linear type : Normal increase of lighting intensity ➤ Cube type : Detailed control in Low dimming area (0~50%) ➤ Root type : Detailed control in high dimming area (50~100%) <p style="text-align: center;">Dimming Curve</p>																		
Dimming Speed	<ul style="list-style-type: none"> Very fast Fast Medium Slow 																		
12~24V Free volt	<ul style="list-style-type: none"> Compatible with wide range of batteries. V-mount battery or Gold-mount battery 																		

Lumos 700GT

➤ Ognisni dscjb hrend ` snmne Kt I nr 6 // FS

L ncdk		Ad l mf ld		0l	1l	2l	3l	4l
Lumos 700GT 200W	No lens (85°)	Illumination	3200K	5,400 lux	1,431 lux	636 lux	358 lux	229 lux
			5600K	5,900 lux	1,564 lux	695 lux	391 lux	250 lux
		Beam diameter	Width	2.32 m	4.15 m	5.98 m	7.81 m	9.65 m
			Height	2.18 m	4.01 m	5.84 m	7.67 m	9.51 m
	Lens (55°)	Illumination	3200K	8,700 lux	2,306 lux	1,025 lux	576 lux	369 lux
			5600K	9,500 lux	2,518 lux	1,119 lux	629 lux	403 lux
		Beam diameter	Width	1.52 m	2.57 m	3.61 m	4.65 m	5.69 m
			Height	1.39 m	2.42 m	3.47 m	4.51 m	5.51 m
	Lens (40°)	Illumination	3200K	15,900 lux	4,214 lux	1,873 lux	1,053 lux	674 lux
			5600K	17,200 lux	4,558 lux	2,026 lux	1,140 lux	729 lux
		Beam diameter	Width	1.21 m	1.94 m	2.67 m	3.40 m	4.12 m
			Height	1.07 m	1.80 m	2.53 m	3.26 m	3.98 m

Lumos 700GT

➤ Kt I nr 6 / FS v lsg Onld nodq sdc xnj d

Size	W599.7 * H549.1 * L144.3 (mm) / W23.61 * H21.62 * L5.68 (inch)
------	--

