


Lumos COLOR ROL 500 Cyclorama

➤ KDC Kf gs enq sgd rst cm

- CRI 90 Ra
- Digital touch LCD display
- Flicker Free
- Stable dimming (0%~100%)
- Standard DMX 512 / RDM

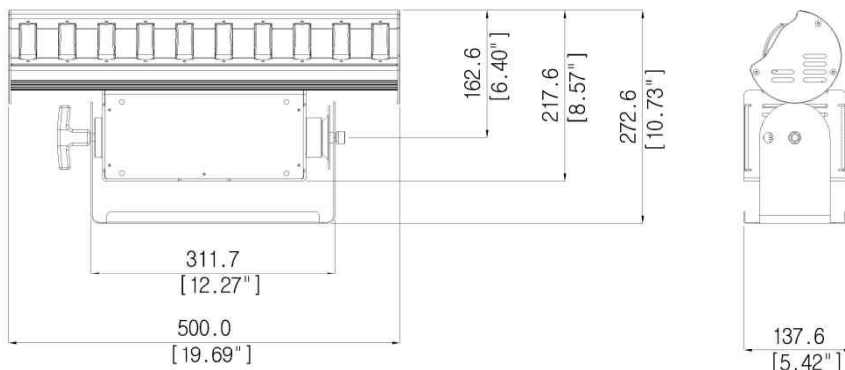

➤ Ognsnl dsqfb lhrndq `shmnne BNQNK QNK 4// Bxblnq I ` 'L lccld onlmq

Beam angle	4 ft	8 ft	12 ft	16 ft	20 ft	1m	2m	3m	4m	5m
90 * 20	199 fc	50 fc	22 fc	12 fc	8 fc	3,000 lux	795 lux	353 lux	199 lux	127 lux

➤ BNKNQ QNK 4// Bxblnq I ` Rodbletb`shmr

Model		Lumos COLOR ROL 500
Electronic	Power Consumption	150W / MAX 200W
	E Characteristics	110~240 V / 50~60Hz
	Power connection	Input : Neutrik PowerCON TRUE 1 Output : Neutrik PowerCON TRUE 1 Daisy chain up to 5
	Operating Temp	-20°C ~ 50°C
	Storage Temp	0°C ~ 60°C
LED	COLOR	R.G.B.W Mixed
	QTY'S	10EA
Optical	Lens type	Asymmetric
	BEAM ANGLE	90 x 20
	LED Lifetime	50,000 hrs
	CCT	2,800~10,000K
	CRI	90 Ra
FITURE	Material	Aluminum + METAL
	Finished	anodize coating
	Waterproof	IP40
	Weight	6Kg
	Dimension	500 * 273 * 138 (mm)
DATA		DMX 512
Mode	Control Mode	• CCT & RGBW • CCT & HSI
	Effect Mode	• Color chase • Strobe • Light Bar



Lumos COLOR ROL Cyclorama

➤ L ncd

Mode	Function
CCT&RGBW	<ul style="list-style-type: none"> • CCT and RGBW mode • CCT 2800K~10000K control (adjust by 100K) • Green-Magenta GN -0.020~+0.020 Control (adjust by 0.001) • Red / Green / Blue / White LED 0~100% Control (adjust by 1 / 25%)
CCT&HSI	<ul style="list-style-type: none"> • CCT and HSI mode • CCT 2800K~10000K control (adjust by 100K) • Green-Magenta GN -0.020~+0.020 Control (adjust by 0.001) • HUE 0°~360° control (adjust by 1 / 15°) • Saturation 0~100% control (adjust by 1 / 25%)
Effect	<ul style="list-style-type: none"> • Color chase - Dimming 0~100% and black out control (adjust by 10%) - Speed 0~100% control (adjust by 1 / 25%) - Saturation 0~100% Control (adjust by 1 / 25%)
	<ul style="list-style-type: none"> • Strobe - Dimming 0~100% and black out control (adjust by 10%) - CCT 2800K~10000K control (adjust by 100K) - Flash speed 0~100% control (adjust by 25%)
	<ul style="list-style-type: none"> • Light bar - Dimming 0~100% and black out control (adjust by 10%) - Change color type (Red / Green / Blue / Red + Green / Red + Blue / Green + Blue / Red + White / Green + White / Blue + white / Red + Blue + white / Red + Green + Blue) - Change flash type (Single / Double / Triple / Triple all / Cycle)
Preset	<ul style="list-style-type: none"> • Save and load 10 presets
Setting	<ul style="list-style-type: none"> • Change DMX address (1~512) • Select DMX protocol (Dimming 8bit or 16bit mode 11) • Dimming speed • Dimming curve
Information	<ul style="list-style-type: none"> • Display status - LED PCB temperature - Fan status and input Voltage - Firmware version and date
Fan control	<ul style="list-style-type: none"> • Fan Auto on - Automatic fan with variable speed • Fan off - Dimming 50% max. / Not use the fan
Fan fault alarm	<ul style="list-style-type: none"> • Display fan fault status (Fan fault) • Automatically dimming down for safe (Dimming 50%)