

# Lumos Glow panel 200C

## ➤ Ideal for the Location, Commercial and Entertainment

- 1KW Tungsten Output
- Hybrid Cooling System
- Full Color RGBW LED
- CRI 95 Ra at 2,800K~10,000K
- All Metal Body
- Flicker Free
- Stable Dimming (0~100%)
- Standard DMX 512 / RDM
- Useful 10 Presets
- Easy Operation
- LED Lifetime : 50,000 hours




## ➤ Photometric Information of Lumos Glow panel 200C

CCT	4 ft	8 ft	12 ft	16 ft	20 ft	1m	2m	3m	4m	5m
3200K	457.1 fc	114.3 fc	50.8 fc	28.6 fc	18.3 fc	6,900 lux	1,829 lux	813 lux	457 lux	293 lux
5600K	463.7 fc	115.9 fc	51.5 fc	29.0 fc	18.5 fc	7,000 lux	1,855 lux	824 lux	464 lux	297 lux

## ➤ Lumos Glow panel 200C Specifications

Power Consumption	200W Nominal / 230W Maximum	
Size	W360 * H298 * L178 (mm) / W14.2 * H11.7 * L7.0 (inch)	
Weight	10.6 kg / 23.4 lb	
Color Temperature	2,800K~10,000K / Green-Magenta Adjustable	
Colored Light	Full RGB / White Color. Saturation Control	
E. Characteristics	AC 100~240V / 50~60Hz	
Dimming	0~100%	
Control	Manual / DMX 512 / RDM	
Software Update	USB	
Flicker	Flicker free	
Cooling System	Hybrid Cooling System	
Operating Temp.	0°C ~ 45°C	
Accessory	4-Leaf Barndoor Pole Operated Yoke (Panning / Tilting) Diffusing Filter Sanp Bag Snap Grid	
Color temperature	3200K	5600K
CCT Tolerance	±150K	±150K
CRI	96 Ra	95 Ra

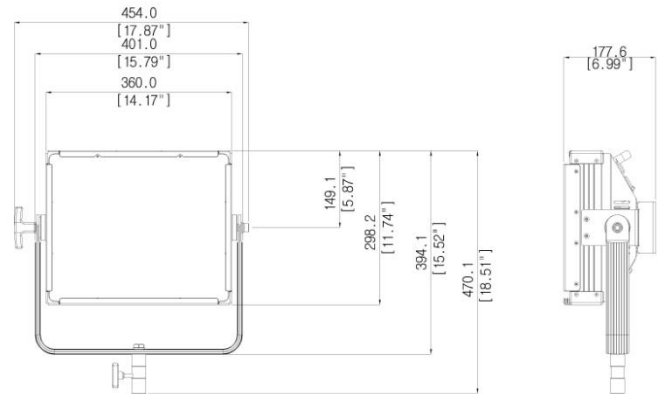

# Lumos Glow panel 200C

## ➤ Mode (RGBW Color type) [1/2]

Mode	Function
CCT	<ul style="list-style-type: none"> <li>• Dimming 0~100% control (adjust by 1 / 25%)</li> <li>• CCT 2800K~10000K control (adjust by 100K)</li> <li>• Green-Magenta GN -0.030~+0.030 Control (adjust by 0.001)</li> </ul>
HSI	<ul style="list-style-type: none"> <li>• Dimming 0~100% control (adjust by 1 / 25%)</li> <li>• HUE 0°~360° control (adjust by 1 / 15°)</li> <li>• Saturation 0~100% control (adjust by 1 / 25%)</li> </ul>
RGBW	<ul style="list-style-type: none"> <li>• Dimming 0~100% control (adjust by 1 / 25%)</li> <li>• Red / Green / Blue / White LED 0~100% Control (adjust by 1 / 25%)</li> </ul>
CCT&RGBW	<ul style="list-style-type: none"> <li>• CCT and RGBW mode</li> <li>• Change mode by up/down button</li> </ul>
CCT&HSI	<ul style="list-style-type: none"> <li>• CCT and HSI mode</li> <li>• Change mode by up/down button</li> </ul>
GEL	<ul style="list-style-type: none"> <li>• Dimming 0~100% control (adjust by 1 / 25%)</li> <li>• CCT 3200K or 5600K Control</li> <li>• Gel filter Brand select (Rosco or LEE filters or no gel)</li> <li>• Gel filter select</li> </ul>
Effect	<ul style="list-style-type: none"> <li>• Color chase</li> <li>- Dimming 0~100% and black out control (adjust by 10%)</li> <li>- Speed 0~100% control (adjust by 1 / 25%)</li> <li>- Saturation 0~100% Control (adjust by 1 / 25%)</li> </ul>
	<ul style="list-style-type: none"> <li>• Strobe</li> <li>- Dimming 0~100% and black out control (adjust by 10%)</li> <li>- CCT 2800K~10000K control (adjust by 100K)</li> <li>- Flash speed 0~100% control (adjust by 25%)</li> </ul>
	<ul style="list-style-type: none"> <li>• Light bar</li> <li>- Dimming 0~100% and black out control (adjust by 10%)</li> <li>- Change color type (Red / Green / Blue / Red + Green / Red + Blue / Green + Blue / Red + White / Green + White / Blue + white / Red + Blue + white / Red + Green + Blue)</li> <li>- Change flash type (Single / Double / Triple / Triple all / Cycle)</li> </ul>
	<ul style="list-style-type: none"> <li>• Television</li> <li>- Dimming 0~100% and black out control (adjust by 10%)</li> <li>- Change color type ( Warmer [2800~4700K] / Neutral [4800~6500K] / Cooler [6600~10000K] )</li> <li>- Change speed (4~24 change / min)</li> </ul>

# Lumos Glow panel 200C

## ➤ Mode (RGBW Color type) [2/2]

Mode	Function
Preset	<ul style="list-style-type: none"><li>• Save and load 10 presets</li><li>- Press the preset button brings up the list of loaded preset and select preset</li><li>- Press and hold down the preset button brings up the list of Saved presets and save preset</li></ul>
Setting	<ul style="list-style-type: none"><li>• Change DMX address (1~512)</li><li>• Select DMX protocol (Dimming 8bit or 16bit mode 0~13)</li><li>• Control Fan mode [Fan auto on / fan off ]</li></ul>
Information	<ul style="list-style-type: none"><li>• Display status</li><li>- LED PCB temperature</li><li>- Fan status and input Voltage</li><li>- Firmware version and date</li></ul>
Low Dimming set.	<ul style="list-style-type: none"><li>• Adjust the low dimming setting</li><li>- Red, Green, Blue, White LED low dimming setting.</li></ul>
Fan control	<ul style="list-style-type: none"><li>• Fan Auto on</li><li>- LED PCB Temp. 0~39°C fan off / 40°C~ Fan on</li><li>• Fan off</li><li>- Dimming 50% max. / Not use the fan</li></ul>
Fan fault alarm	<ul style="list-style-type: none"><li>• Display fan fault status (Fan fault)</li><li>• Automatically dimming down for safe (Dimming 50%)</li></ul>

# Lumos Glow panel 200C

## ➤ decibel measurements of Lumos Glow panel 200C

Model	1m	2m	3m
Lumos Glow panel 200C 200W	26 dB	25 dB	24 dB

### Fan auto on mode (Hybrid cooling system)

The patented technology to improve air flow to cool down the heat created inside the product.

The convection heat mode is at LED PCB temperatures below 39°C. (No fan)

And cooling fans operate automatically when LED PCB temperatures above 40°C.

### fan off mode

- Not use the fan mode
- Display fan off status (Fan off)
- Dimming 0~50% control (adjust by 1 / 25%)

## ➤ Photometric information of Lumos Glow panel 200C

Model	Beam angle		1m	2m	3m	4m	5m	
Lumos Glow panel 200C 200W	85°	Illumination	3200K	6,900 lux	1,829 lux	813 lux	457 lux	293 lux
			5600K	7,000 lux	1,855 lux	824 lux	464 lux	297 lux
		Beam diameter	Width	2.2 m	4.0 m	5.8 m	7.7 m	9.5 m
			Height	2.1 m	4.0 m	5.8 m	7.6 m	9.4 m